


FDV DOKUMENT 3322500

ipasTM

Linear XHE 100W 4000K

33 225 00 / 810017

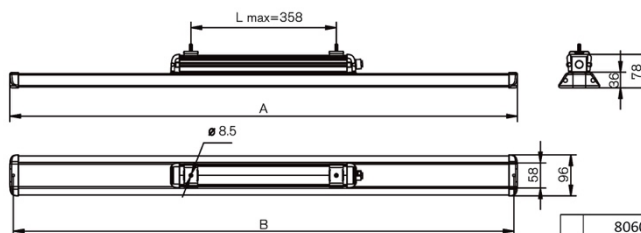

	806017	810017
A	1190	1490
B	1174	1474




Art nr	El.nr	Produktnavn	Δ	Lysytelse	DIM	System eff	CRI	Lys farge	IP	Frage
810017	33 225 00	Linear XHE 100W 1,5m	110°	10800lm	x	100W	>80	4000K	69K	Sort



Tekniske data :	89W (System eff 100W)	
Spennig :	220-240VAC 50/60Hz	
LED chip :	Hongli 2835 SMD LED	
Lysytelse :	10800 lm	
Lysfarge :	4000K	
CRI/Ra :	>80	
Strålingsvinkel :	110°	
Utbyttbar LED :	Nei	
Driftsstrøm :	LED driver 1000mA konstantstrøm	
Dimming :	Nei	
Sertifisert :	CE	
Omgivelsestemp :	-40°C +45°C	
Materiale :	Aluminum, SUS316, tempered glass	
Farge :	Sort	
IP Klasse armaturhus :	IP69K	
IP Klasse LED Driver :	IP20	
Isolasjonsklasse :	Klasse I	
Frontlinse :	Tempered glass	
Tilkobling :	1,5m ledning	
Levetid :	50 000 L80	
Produktstørrelse :	L1490mmxW96mmxH78mm	
Vekt :	4000g	
Antall per eske :	1 stk	Dimensjon : 1550x114x87.5
Antall per ytterkartong :	4 stk	Dimension : 1600x250x195

Resirkulering/WEEE:

Produktet er definert som miljøavfall og skal samles inn av et EE-returselskap.
IPAS er medlem av Renas AS. Se mer på www.renas.no



Rengjøring:

Planmessig rengjøring gir deg best belysning over tid.

Gjør anlegg alltid strømløst før rengjøring.

Det anbefales støvtørking med mikrofiber. Intervaller avhenger av bruksområdets støv-/smussmengde. Unngå sterke kjemikalier (ph>7) og vær varsom med frontlinse eller reflektor hvis denne er tilgjengelig. Ikke spray midler direkte på armatur. Særlig tilsmussede områder kan rengjøres med mildt såpevann, men prøv på et avgrenset område først. LED Driver eller åpne komponenter må ikke utsettes for vann eller fuktighet.
GARANTI: IPAS yter 5 års garanti. Se også ASLEM12 for mer informasjon.

IPAS AS

Østre Rosten 2A 7075 TILLER


www.ipas.no post@ipas.no Tlf 40 00 15 59.

V.25.03.2019

EFO-LINK



Linear XHE

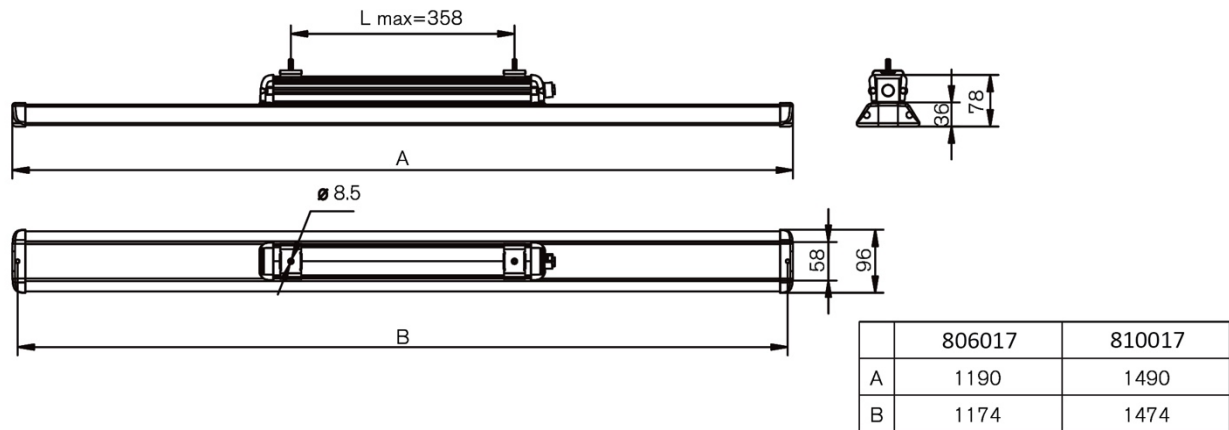

IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. For indoor and outdoor use.

MAIN PARAMETER:


Product:	806017	810017
Rated Voltage	AC 220-240V 50/60Hz	AC 220-240V 50/60Hz
LED Rated Power	54W	89W
System Power	60W	100W
LED	Hongli 2835 SMD LED	Hongli 2835 SMD LED
LED Driver	Constant Current 600mA	Constant Current 1000mA
Color Temperature	4000K	4000K
Protection	Class I	Class I
Beam Angle	110°	110°
IP Rated	IP69K	IP69K
Operation Temperature	-40°C ~ 45°C	-40°C ~ 45°C
Weight:	3,8 kgs	4,4 kgs
Product Size:	1190mmx96mmx78mm	1490mmx96mmx78mm

INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

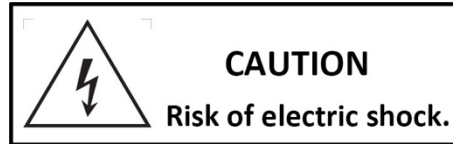

Hardware Kit (Ceiling Installation)




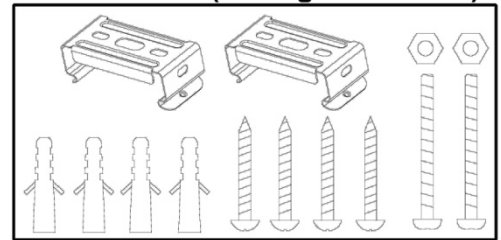


INSTALLATION STEPS:


1. Select the required position for the luminaire. Ensure the fixings are suitable to withstand the weight of this product.

a) with Ceiling Bracket

- Fix Ceiling Brackets using hardware kit
- Install the luminaire to the ceiling
- Tighten Ceiling Bracket using screw and locking nut

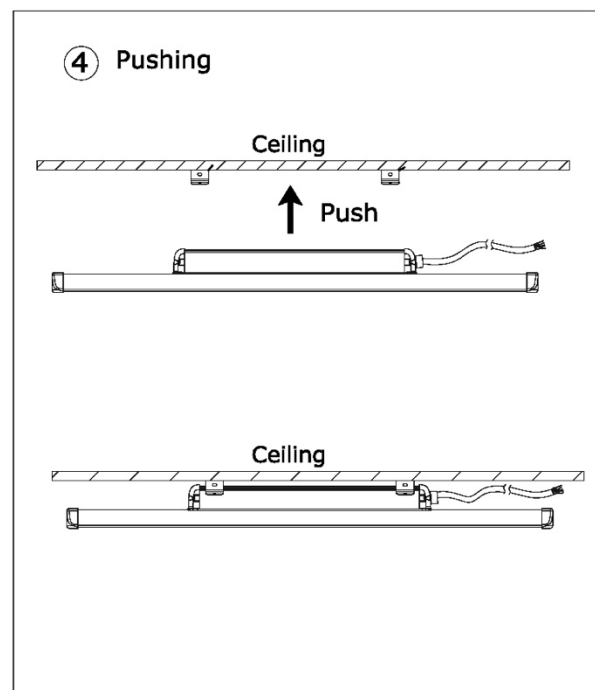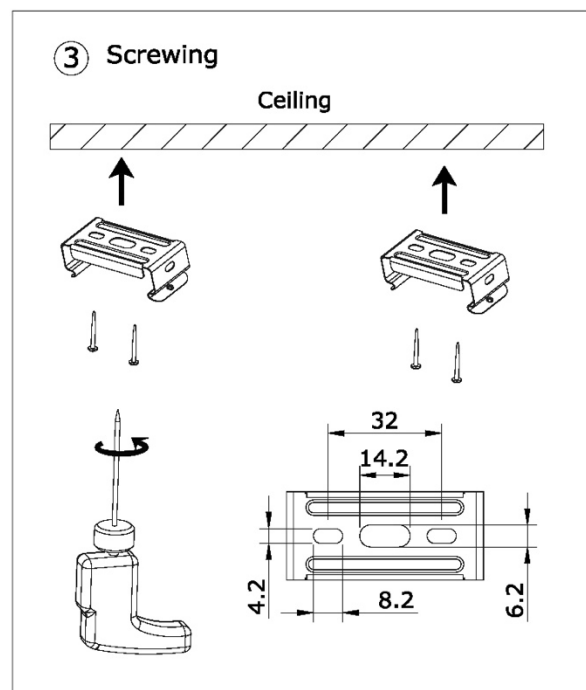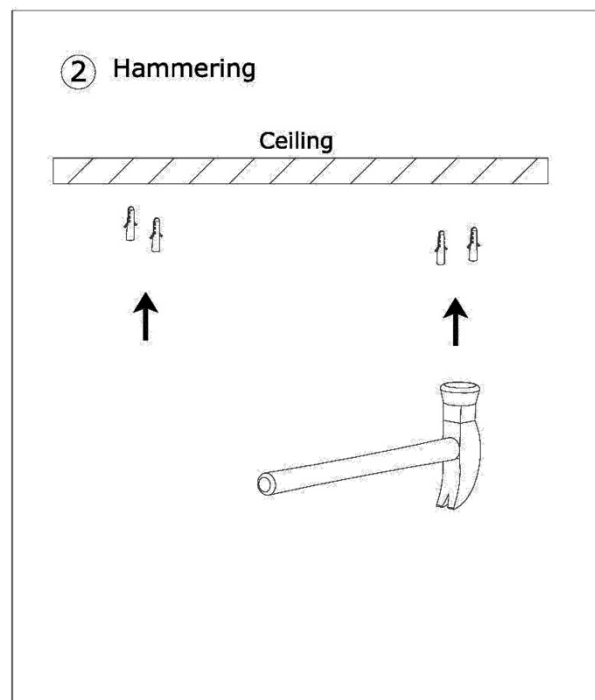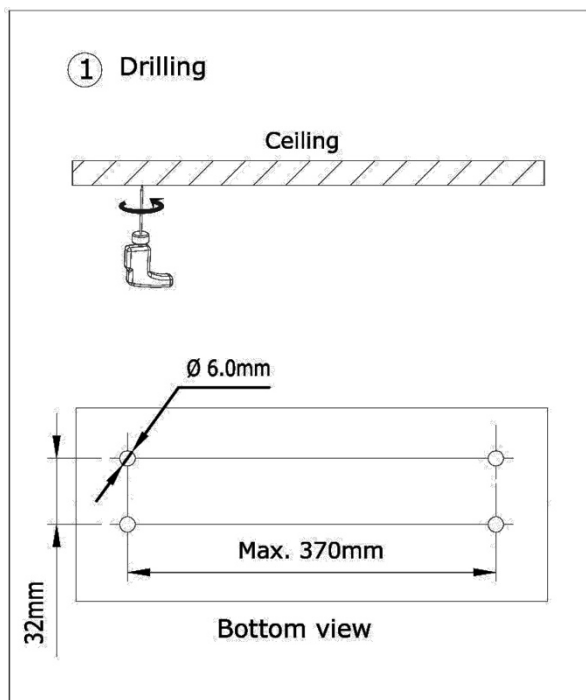


⑤ Screwing

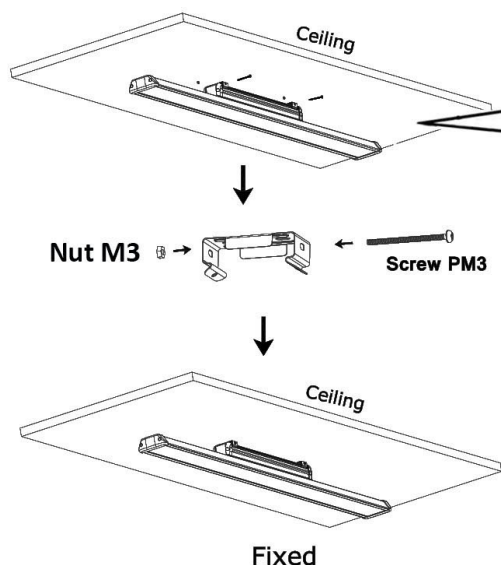

1. Install the luminaire up to ceiling bracket. Make sure it is fixed in position.
2. Tighten ceiling bracket using Screw PM3 and Nut M3 to have the luminaire securely locked.

b) with Suspension Wire

- Install the Mounting Hooks to the ceiling and ensure they are securely located
- Install the suspension wires to fixed Hooks

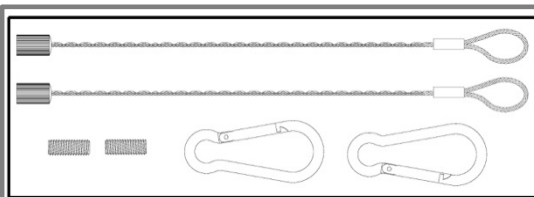

**Suggested accessories for suspension installation.
(NOT included)**

①

Ceiling

Bottom view



Article nr	wattage	AB
806017	60W	1171mm
810017	100W	1471mm

②

Ceiling

Hook Dimension

WARNING: The luminaire is heavy and must have suitable fixings.

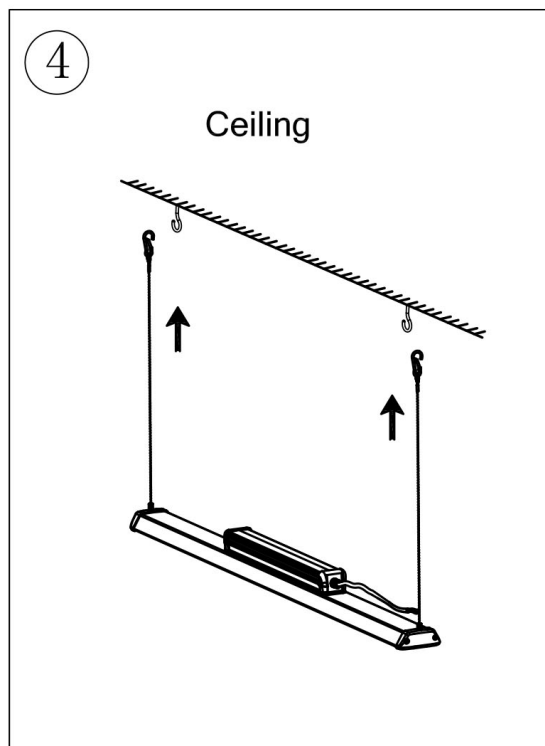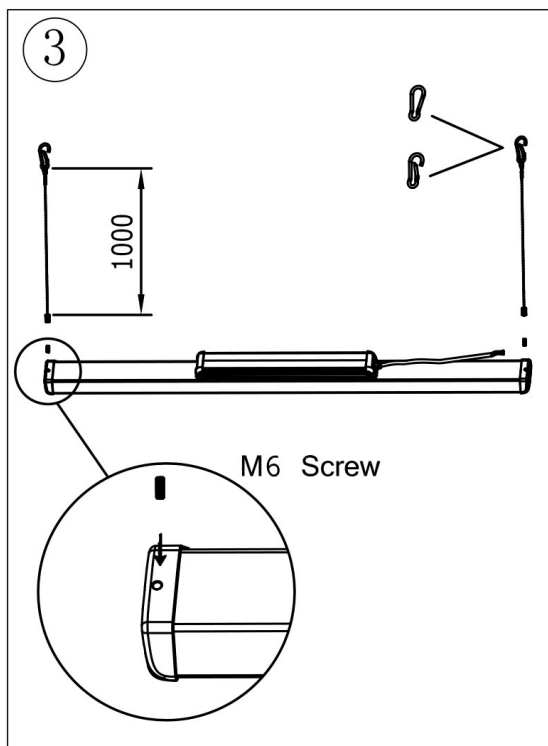

2. Provide a power supply to the luminaire using a suitable cable. Connect the mains supply to the luminaire.

- Mains supply LIVE (Brown) – L
- Mains supply NEUTRAL (Blue) – N
- Mains supply EARTH (Yellow/Green) - E

AC/L (Brown)
AC/N (Blue)
FG⊕ (Green/Yellow)

IP65 Junction box not included.
Installation may require advice from a qualified person.

IMPORTANT: These luminaires are Class I and must be earthed.

3. Switch on the power supply.

