

Cepex panel mounted receptacle - Part no. 4112



- screw terminals
- also suitable for installation in cable ducts and columns
- meeting DIN 18032 standards for ball rebound

Protection type IP 44

Ampere 16A


Poles 3p

Voltage 230V

Hertz 50-60 Hz

Earth position 6h

Std. Pack. 5 Qty.

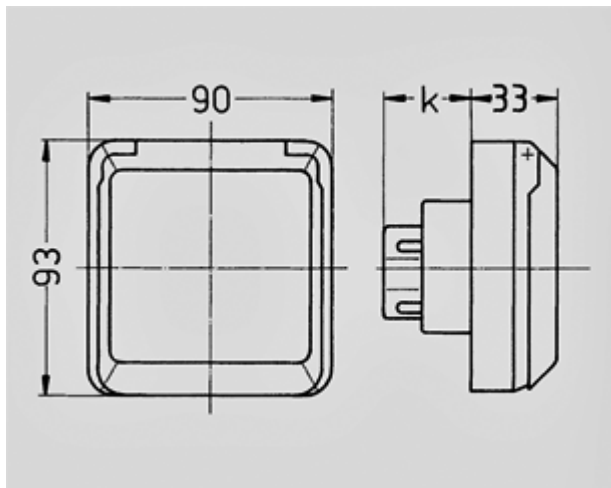

Drawing	Amp.	16			32		
1 MB 315	Poles	3	4	5	3	4	5
Dim. in mm	k	32	32	32	48	48	48
Terminal for cond. cross		1,5	1,5	1,5	2,5	2,5	2,5
section (mm ²) min.-max.		—4	—4	—4	—6	—6	—6